


BEGA

Photometric Filename: 33344.IES

TEST: BE_33344
TEST LAB: BEGA
DATE: 7/3/2017
LUMINAIRE: 33 344
LAMP: 11.8W LED

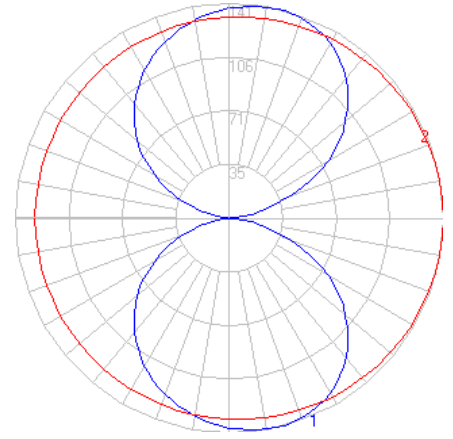


Characteristics


Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	846
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	60
Total Luminaire Watts	14
Ballast Factor	1.00
CIE Type	General Diffuse
Spacing Criterion (0-180)	N.A.
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	N.A.
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	0.50 ft
Luminous Width (90-270)	1.05 ft
Luminous Height	0.00 ft

Zonal Lumen Summary

Zone	Lumens
0-10	14.20
10-20	40.65
20-30	61.62
30-40	74.47
40-50	77.43
50-60	69.83
60-70	52.29
70-80	27.57
80-90	5.13
90-100	5.13
100-110	27.57
110-120	52.29
120-130	69.83
130-140	77.43
140-150	74.47
150-160	61.62
160-170	40.65
170-180	14.20

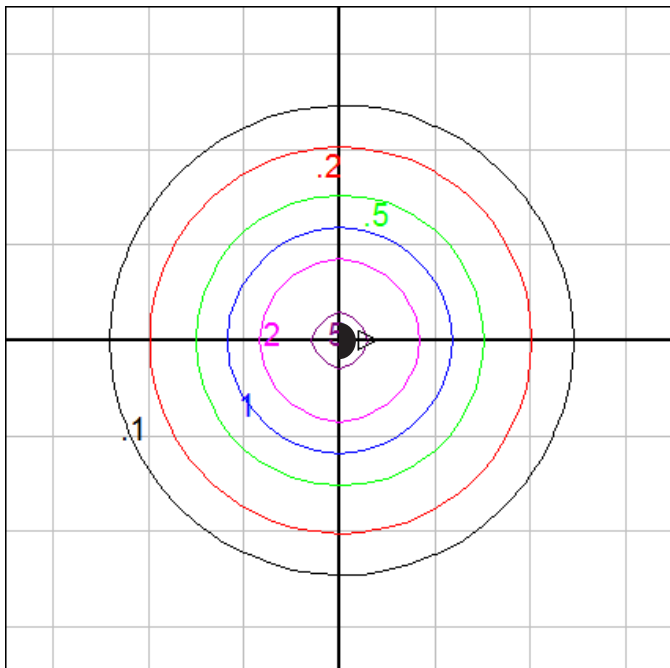

Wall Mount - Isofootcandle grid on floor
Mounting Height = 5 ft. Grid Spacing = 5 ft.

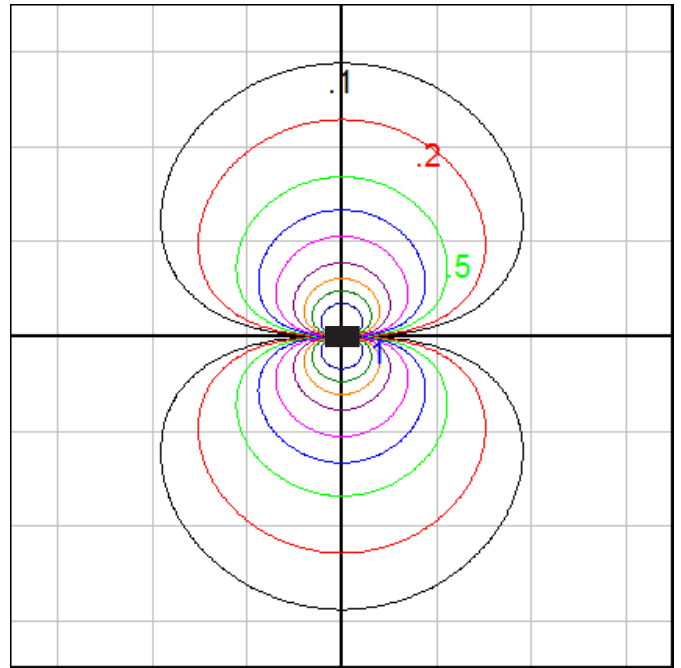

Wall Mount - Isofootcandle grid on wall
Grid Spacing = 5 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2018

4/20/2018