


BEGA

Photometric Filename: 33581.IES

TEST: BE_33581
TEST LAB: BEGA
DATE: 8/23/2016
LUMINAIRE: 33 581
LAMP: 7.9W LED

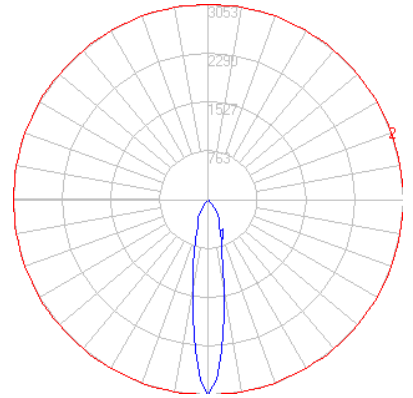


Characteristics

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	747
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	69
Total Luminaire Watts	10.9
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.32
Spacing Criterion (90-270)	0.32
Spacing Criterion (Diagonal)	0.40
Basic Luminous Shape	Circular
Luminous Length (0-180)	0.00 ft
Luminous Width (90-270)	0.36 ft (Diameter)
Luminous Height	0.00 ft
R9 Value	N.A.


Lum. Classification System (LCS)

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	313.4	N.A.	41.9
FM (30-60)	59.4	N.A.	7.9
FH (60-80)	0.7	N.A.	0.1
FVH (80-90)	0.2	N.A.	0.0
BL (0-30)	313.4	N.A.	41.9
BM (30-60)	59.4	N.A.	7.9
BH (60-80)	0.7	N.A.	0.1
BVH (80-90)	0.2	N.A.	0.0
UL (90-100)	0.0	N.A.	0.0
UH (100-180)	0.0	N.A.	0.0
Total	747.4	N.A.	100.0

BUG Rating B1-U0-G0

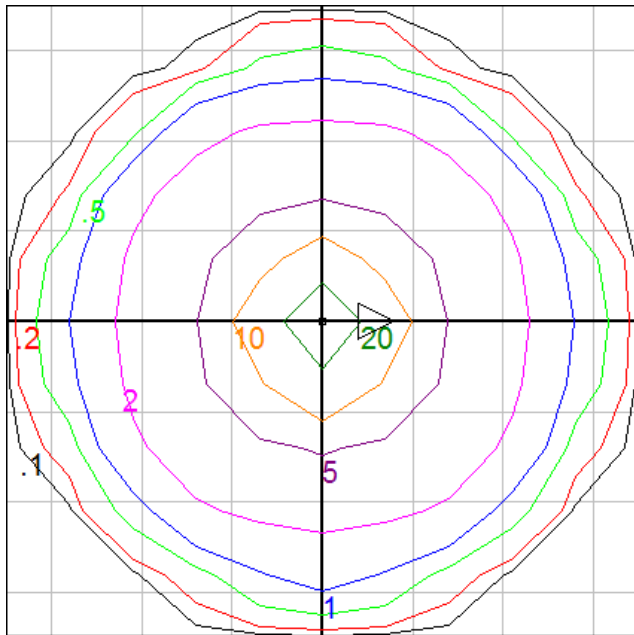

Mounting Height = 8 ft. Grid Spacing = 2.5 ft.

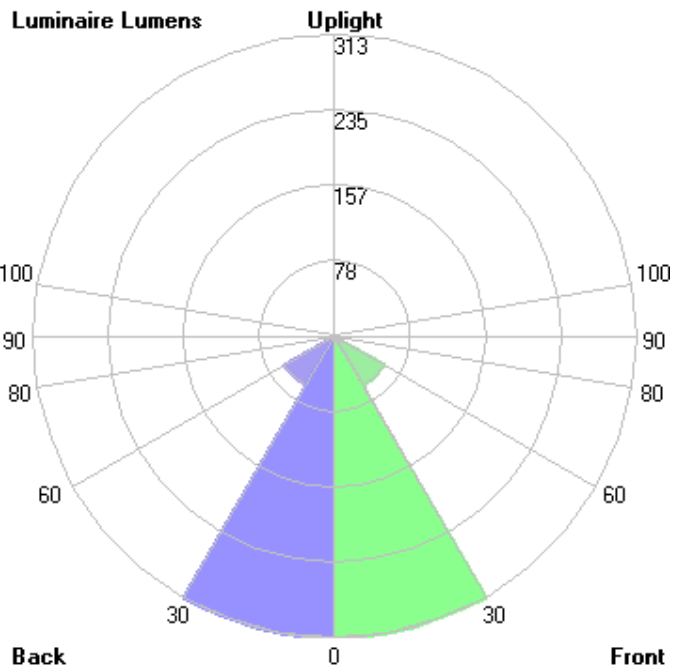

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2017

6/5/2017