


BEGA

Photometric Filename: 34562.IES

TEST: BE_34562
TEST LAB: BEGA
DATE: 3/1/2018
LUMINAIRE: 34 562
LAMP: 9.6W LED

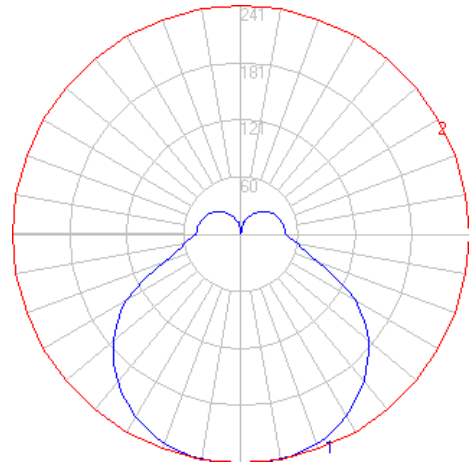


Characteristics

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1098
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	92
Total Luminaire Watts	12
Ballast Factor	1.00
CIE Type	Semi-Direct
Spacing Criterion (0-180)	1.38
Spacing Criterion (90-270)	1.38
Spacing Criterion (Diagonal)	1.50
Basic Luminous Shape	Circular w/ Sides
Luminous Length (0-180)	0.00 ft
Luminous Width (90-270)	0.52 ft (Diameter)
Luminous Height	0.17 ft

Luminance Data (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	9587	9587	9587
55	8831	8831	8831
65	7141	7141	7141
75	5386	5386	5386
85	5398	5398	5398

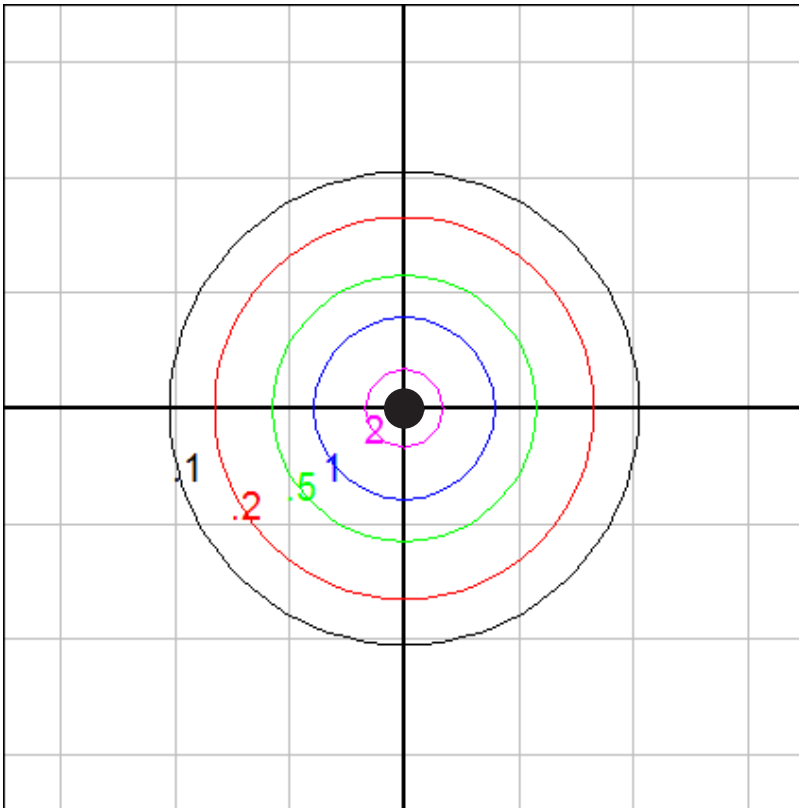

Mounting Height = 10 ft. Grid Spacing = 10 ft.

Zonal Lumen Summary

Zone	Lumens
0-10	23.02
10-20	67.62
20-30	105.97
30-40	133.36
40-50	146.30
50-60	142.19
60-70	111.69
70-80	75.65
80-90	58.64
90-100	51.13
100-110	47.96
110-120	42.34
120-130	34.74
130-140	26.06
140-150	17.32
150-160	9.61
160-170	4.06
170-180	0.55

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2018

9/27/2018