
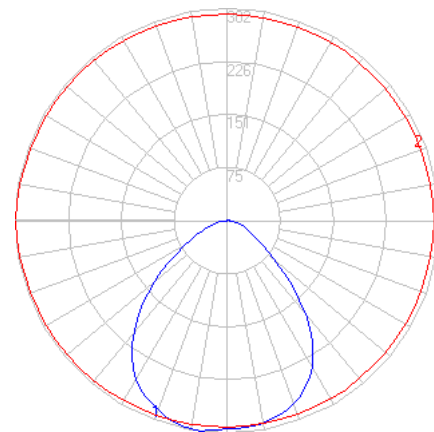


BEGA

Photometric Filename: 50071.IES

TEST: LI_50071
TEST LAB: BEGA
DATE: 4/13/2016
LUMINAIRE: 50 071
LAMP: 6.1W LED

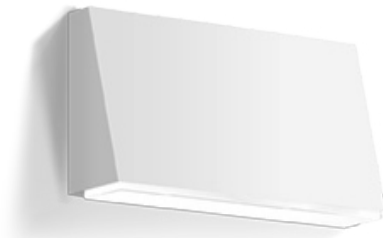


Characteristics


Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	708
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	89
Total Luminaire Watts	8
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.22
Spacing Criterion (90-270)	1.22
Spacing Criterion (Diagonal)	1.32
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	0.12 ft
Luminous Width (90-270)	0.56 ft
Luminous Height	0.01 ft

Zonal Lumen Summary

Zone	Lumens
0-10	28.17
10-20	80.73
20-30	121.62
30-40	140.47
40-50	130.10
50-60	98.10
60-70	61.96
70-80	31.45
80-90	9.20
90-100	2.07
100-110	1.67
110-120	1.26
120-130	0.80
130-140	0.41
140-150	0.14
150-160	0.02
160-170	0.00
170-180	0.00

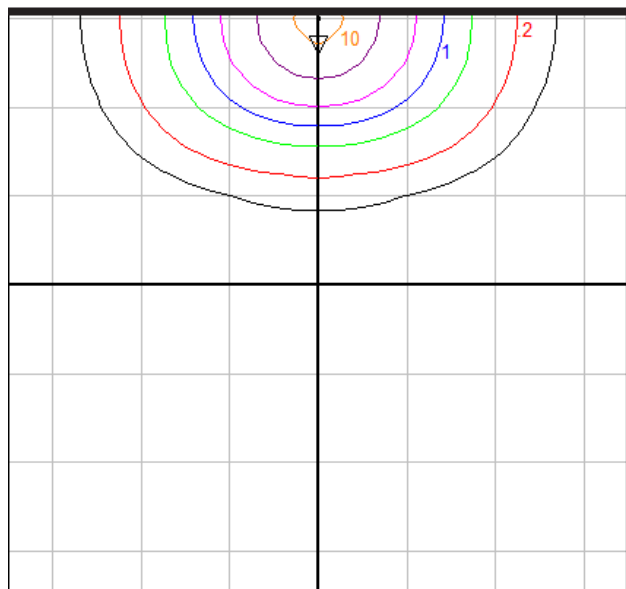

Mounting Height = 5 ft. Grid Spacing = 5 ft.
Isofootcandle grid on floor

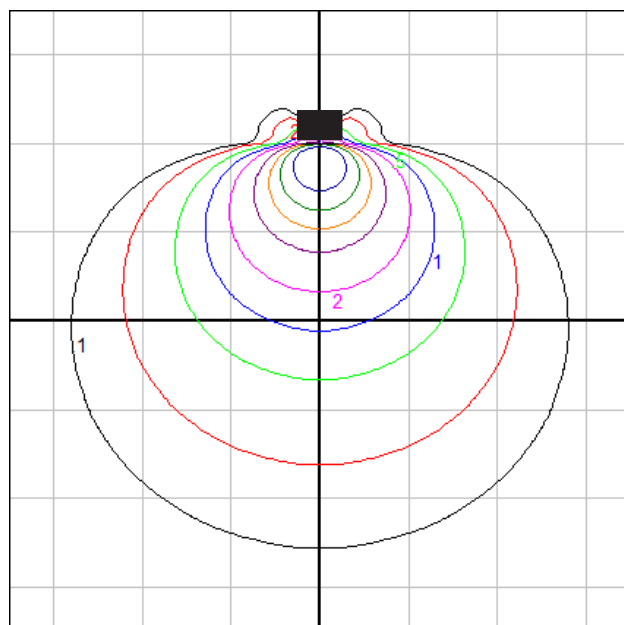

Grid Spacing = 2.5 ft.
Isofootcandle grid on wall

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2016

11/3/2016