


BEGA

Photometric Filename: 50147.IES

TEST: LI_50147
TEST LAB: BEGA
DATE: 6/9/2016
LUMINAIRE: 50 147
LAMP: 33.6W LED

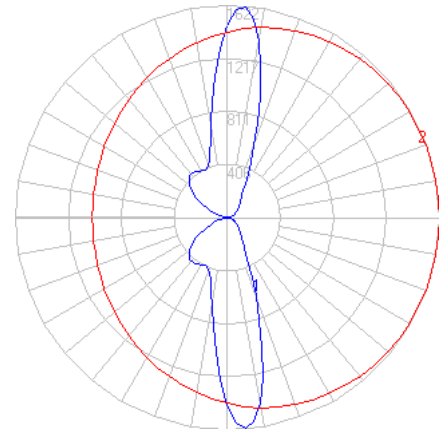


Characteristics


Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	3343
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	86
Total Luminaire Watts	39
Ballast Factor	1.00
CIE Type	General Diffuse
Spacing Criterion (0-180)	N.A.
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	N.A.
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	0.16 ft
Luminous Width (90-270)	0.98 ft
Luminous Height	0.00 ft

Zonal Lumen Summary

Zone	Lumens
0-10	125.98
10-20	280.59
20-30	305.51
30-40	290.91
40-50	260.25
50-60	203.52
60-70	130.58
70-80	61.92
80-90	13.17
90-100	13.32
100-110	62.72
110-120	131.54
120-130	203.77
130-140	259.04
140-150	288.82
150-160	303.07
160-170	280.06
170-180	128.10

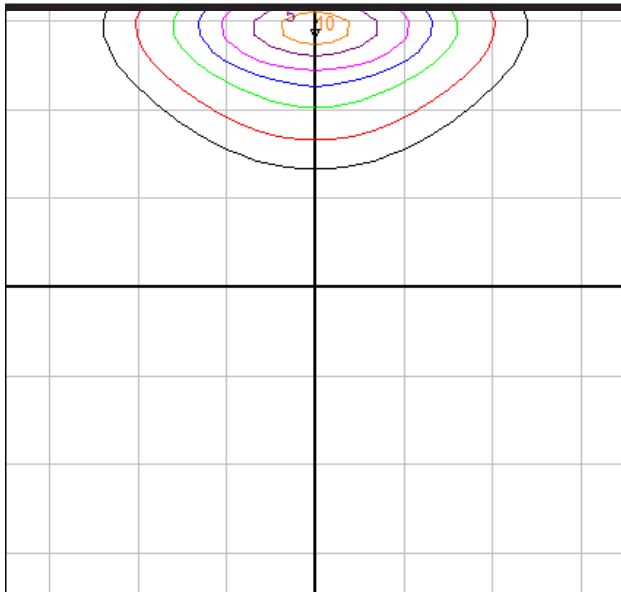

Mounting Height = 10 ft. Grid Spacing = 10 ft.
Isofootcandle grid on floor

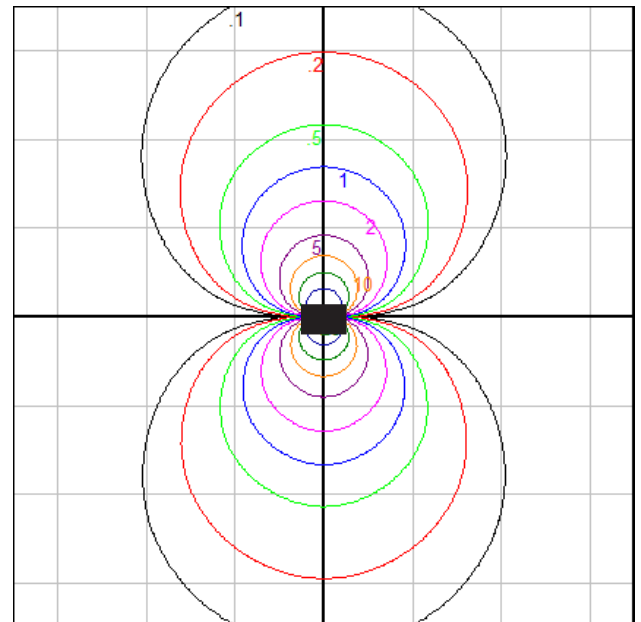

Grid Spacing = 5 ft.
Isofootcandle grid on wall

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2016

11/8/2016