


BEGA

Photometric Filename: 77040.IES

TEST: NA
TEST LAB: BEGA
DATE: 04/24/2015
LUMINAIRE: 77 040
LAMP: 36.2W LED

All results in accordance with IESNA LM-63-95




Characteristics

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1894
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	44
Total Luminaire Watts	43
Ballast Factor	1.00
CIE Type	Indirect
Spacing Criterion (0-180)	N.A.
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	N.A.
Basic Luminous Shape	Circular
Luminous Length (0-180)	0.00 m
Luminous Width (90-270)	0.24 m (Diameter)
Luminous Height	0.00 m

Zonal Lumen Summary

Zone	Lumens
0-10	0.00
10-20	0.00
20-30	0.00
30-40	0.00
40-50	0.00
50-60	0.00
60-70	0.06
70-80	0.20
80-90	0.35
90-100	0.87
100-110	5.18
110-120	14.14
120-130	29.64
130-140	42.06
140-150	51.09
150-160	241.51
160-170	631.90
170-180	876.77

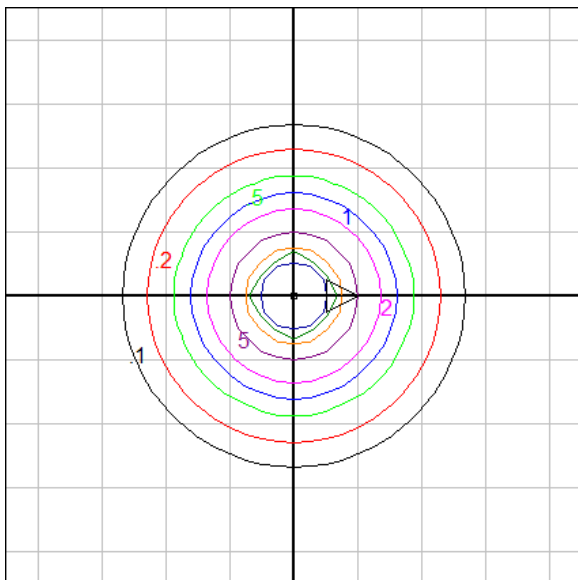

Mounting Height = 2 ft. Grid Spacing = 2 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2016

2/11/2016