


BEGA

Photometric Filename: 77118.ies

TEST: BE_77118
TEST LAB: BEGA
DATE: 9/15/2016
LUMINAIRE: 77 118
LAMP: 3W LED

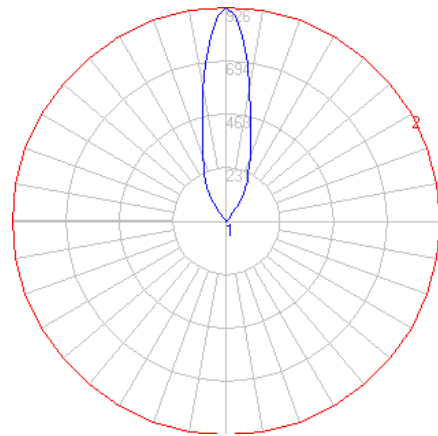


Characteristics


NEMA Type	5 H x 5 V
Maximum Candela	925.9
Maximum Candela Angle	0 H 0 V
Horizontal Beam Angle (50%)	26.1
Vertical Beam Angle (50%)	26.1
Horizontal Field Angle (10%)	70.2
Vertical Field Angle (10%)	70.2
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	105
Beam Efficiency	N.A.
Field Lumens	321
Field Efficiency	N.A.
Spill Lumens	31
Luminaire Lumens	352
Total Efficiency	N.A.
Total Luminaire Watts	5.3
Ballast Factor	1.00

Zonal Lumen Summary

Zone	Lumens
0-10	0.00
10-20	0.00
20-30	0.00
30-40	0.00
40-50	0.00
50-60	0.00
60-70	0.00
70-80	0.00
80-90	0.00
90-100	0.01
100-110	0.22
110-120	0.62
120-130	1.74
130-140	4.72
140-150	57.18
150-160	103.64
160-170	113.95
170-180	69.37

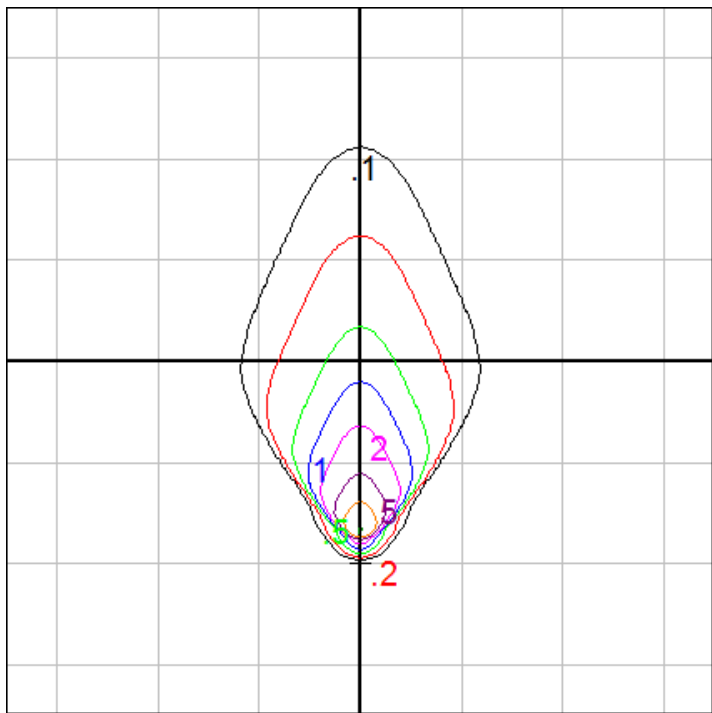

Fixture Setback = 1 ft. Grid Spacing = 5 ft.

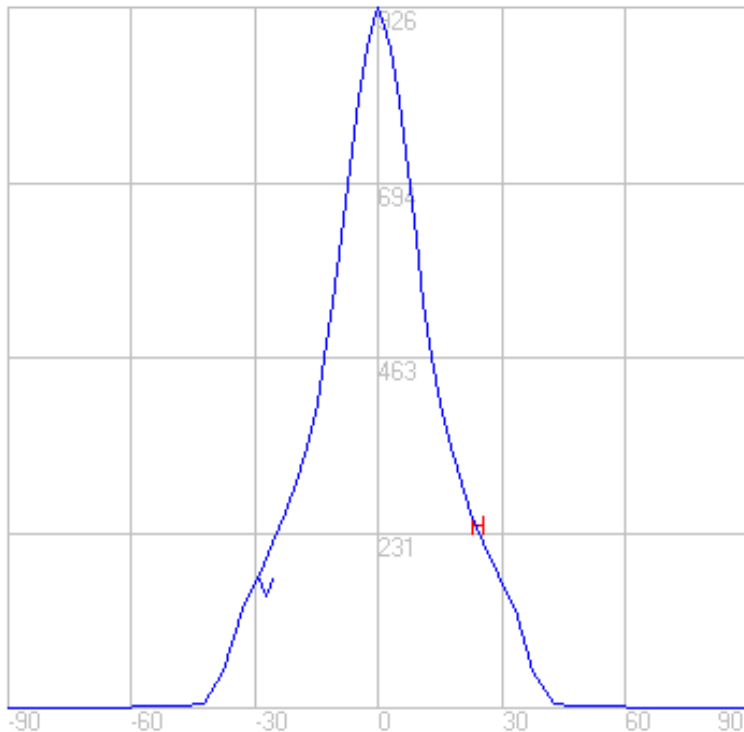

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2017

11/9/2017