

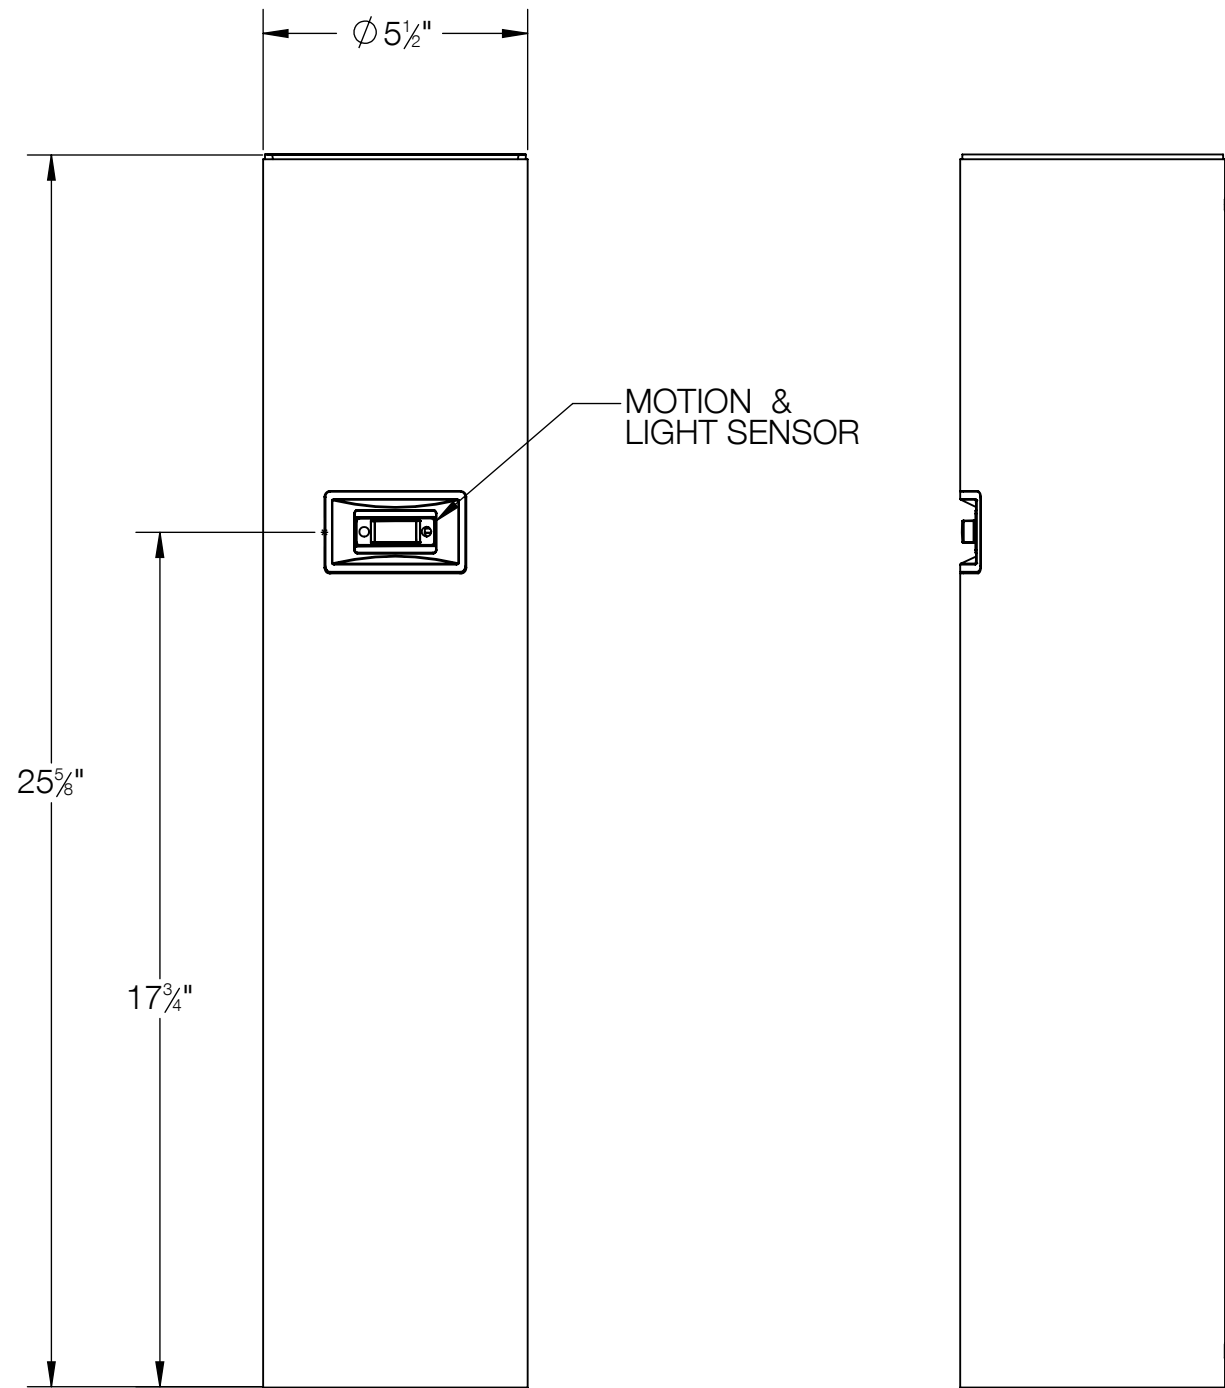


REV	CHANGED BY	DESCRIPTION	DATE

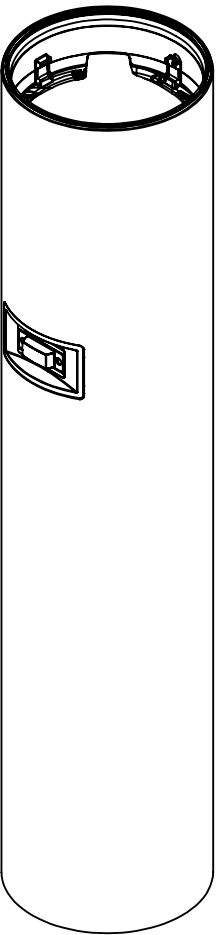


- NOTES:
1. INCLUDES 79824 - ANCHORAGE KIT
 2. OPTIONAL DIRECT BURRIAL ANCHORAGE 70894
 3. FACTORY DEFAULT SETTINGS:
 - POWER ON TO 30% WHEN LIGHT < 500 LUX
 - MOTION ONLY ACTIVE WHEN LIGHT < 500 LUX
 - MOTION DETECED: POWER ON TO 100%
 - AFTER 10 MIN FADE TO 30%
 - POWER TO 0% WHEN LIGHT > 500 LUX
 4. SYSTEM BOLLARD TUBE FOR USE WITH DALI-2 ENABLED SYSTEM BOLLARD HEAD ONLY. SEE WEBSITE FOR COMPATIBLE OPTIONS.

BEGA				
1000 BEGA Way, Carpinteria, California 93013			P (805) 684-0533 - www.bega-us.com	
APPROVED: _____ DATE: _____		DESCRIPTION: SYSTEM BOLLARD TUBE - INTEGRAL DALI-2 ENABLED PHOTOCELL AND PIR MOTION SENSOR		
TYPE: _____				
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BEGA NORTH AMERICA, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BEGA NORTH AMERICA, INC. IS PROHIBITED.		SIZE B	PART NO. 84 759	REV -
		NOT TO SCALE	10/7/2025	SHEET 1 OF 4

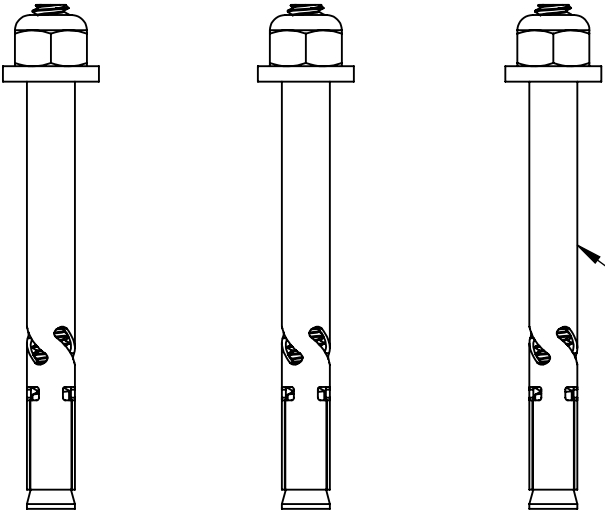

ANCHOR KIT INCLUDES (3)
1/4" X 2-1/4" STAINLESS
STEEL SLEEVE ANCHORS

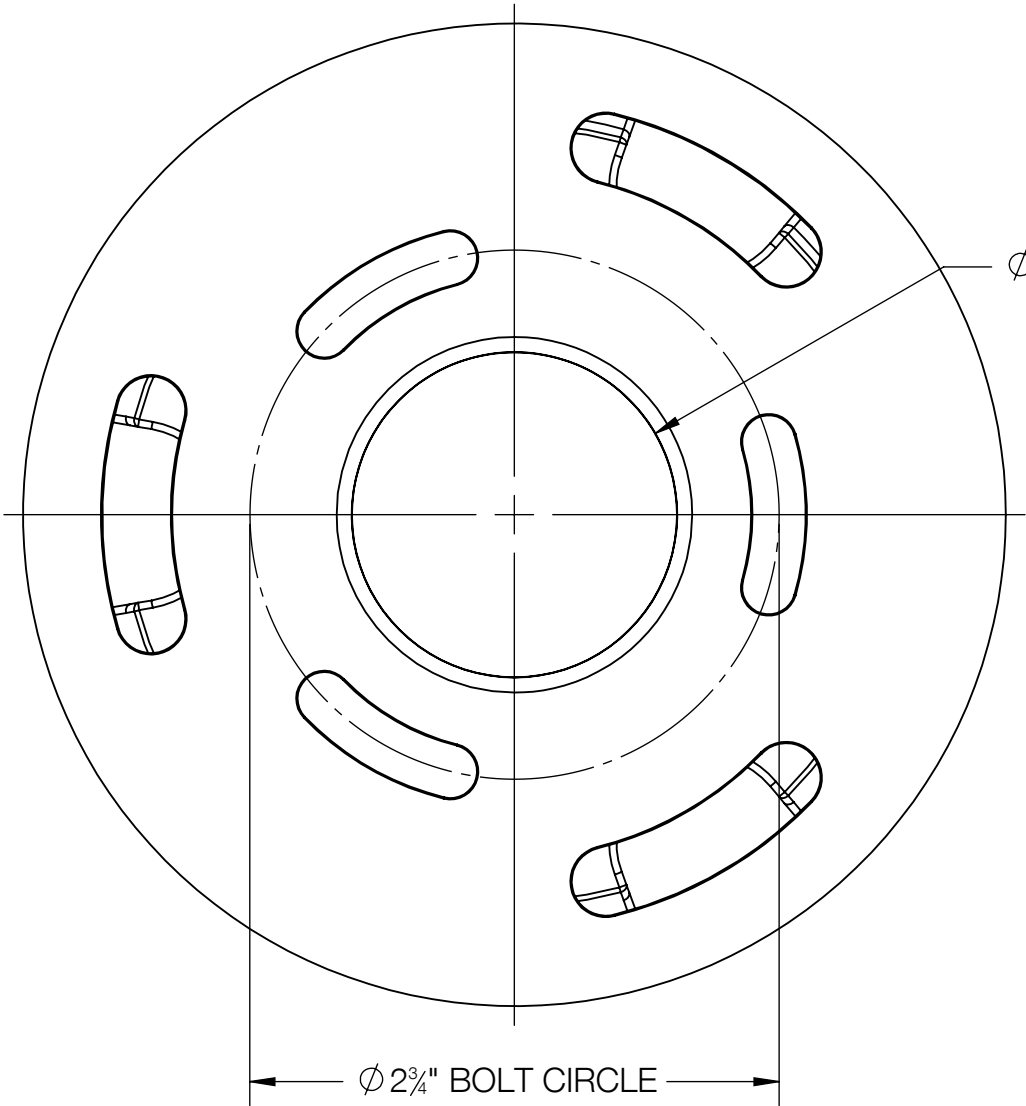

$\varnothing 1\frac{3}{4}"$ CONDUIT ENTRY

$\varnothing 2\frac{3}{4}"$ BOLT CIRCLE

REV	CHANGED BY	DESCRIPTION	DATE

NOTE:
1. ANCHOR KIT INCLUDED. ANCHOR KIT DOES NOT
INCLUDE TEMPLATE - USE BOLLARD BASE AS
TEMPLATE (SHOWN)

BEGA

1000 BEGA Way, Carpinteria, California 93013 P (805) 684-0533 - www.bega-us.com





APPROVED: _____ DATE: _____
TYPE: _____

DESCRIPTION:
ANCHORAGE KIT

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY
OF BEGA NORTH AMERICA, INC.
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN
PERMISSION OF BEGA NORTH AMERICA, INC. IS PROHIBITED.

SIZE	PART NO.	REV
B	79824	-
NOT TO SCALE	8/21/2025	SHEET 2 OF 4


REV	CHANGED BY	DESCRIPTION	DATE

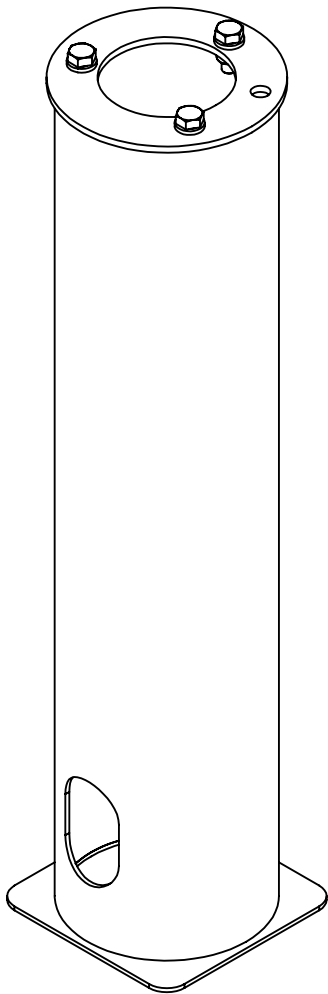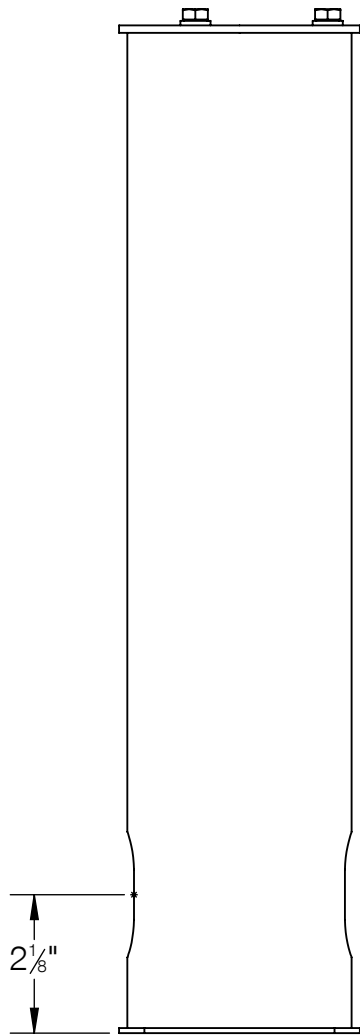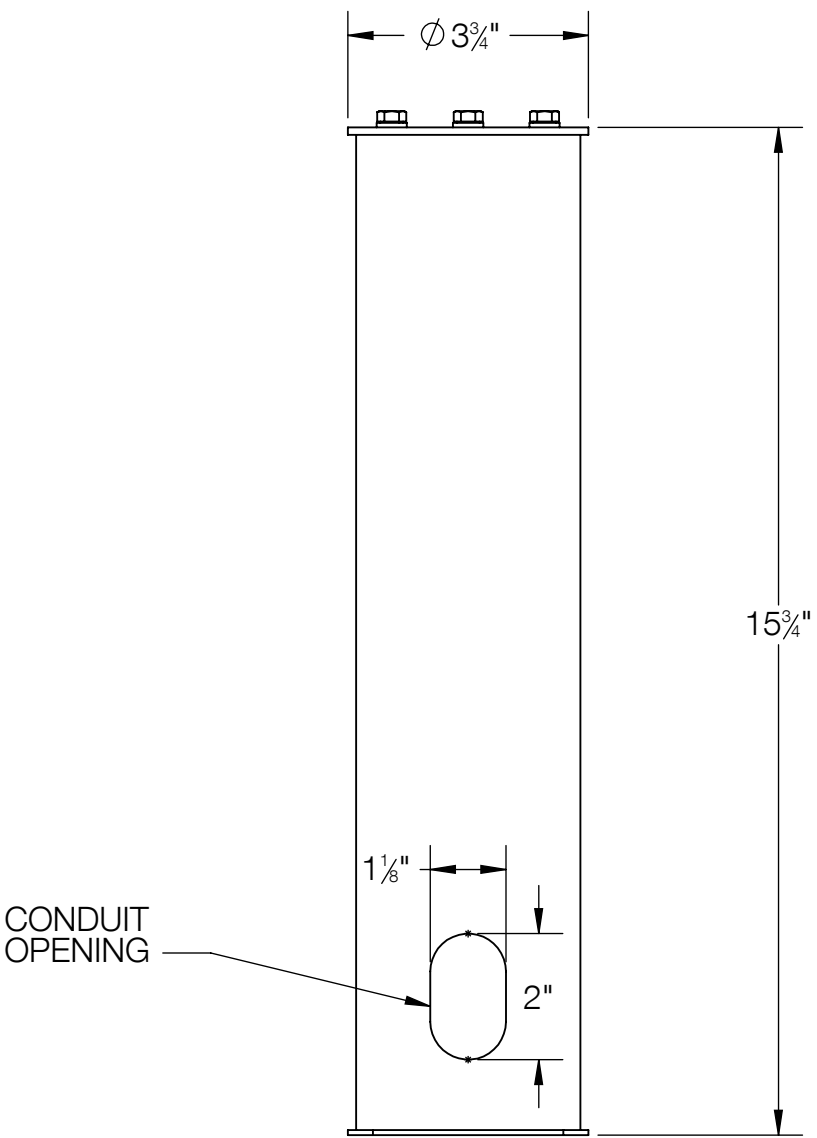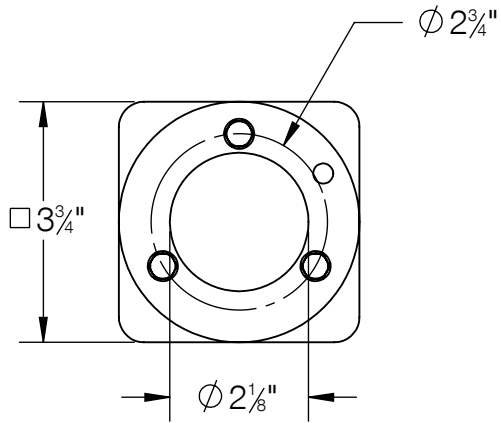

NOTE:
1. 70894 OPTIONAL DIRECT BURIAL ANCHOR KIT

BEGA				
1000 BEGA Way, Carpinteria, California 93013			P (805) 684-0533 - www.bega-us.com	
APPROVED: _____		DATE: _____		DESCRIPTION: DIRECT BURIAL ANCHOR KIT
TYPE: _____				
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BEGA NORTH AMERICA, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BEGA NORTH AMERICA, INC. IS PROHIBITED.		SIZE	PART NO.	REV
		B	70894	-
		NOT TO SCALE	8/21/2025	SHEET 3 OF 4

REV	CHANGED BY	DESCRIPTION	DATE

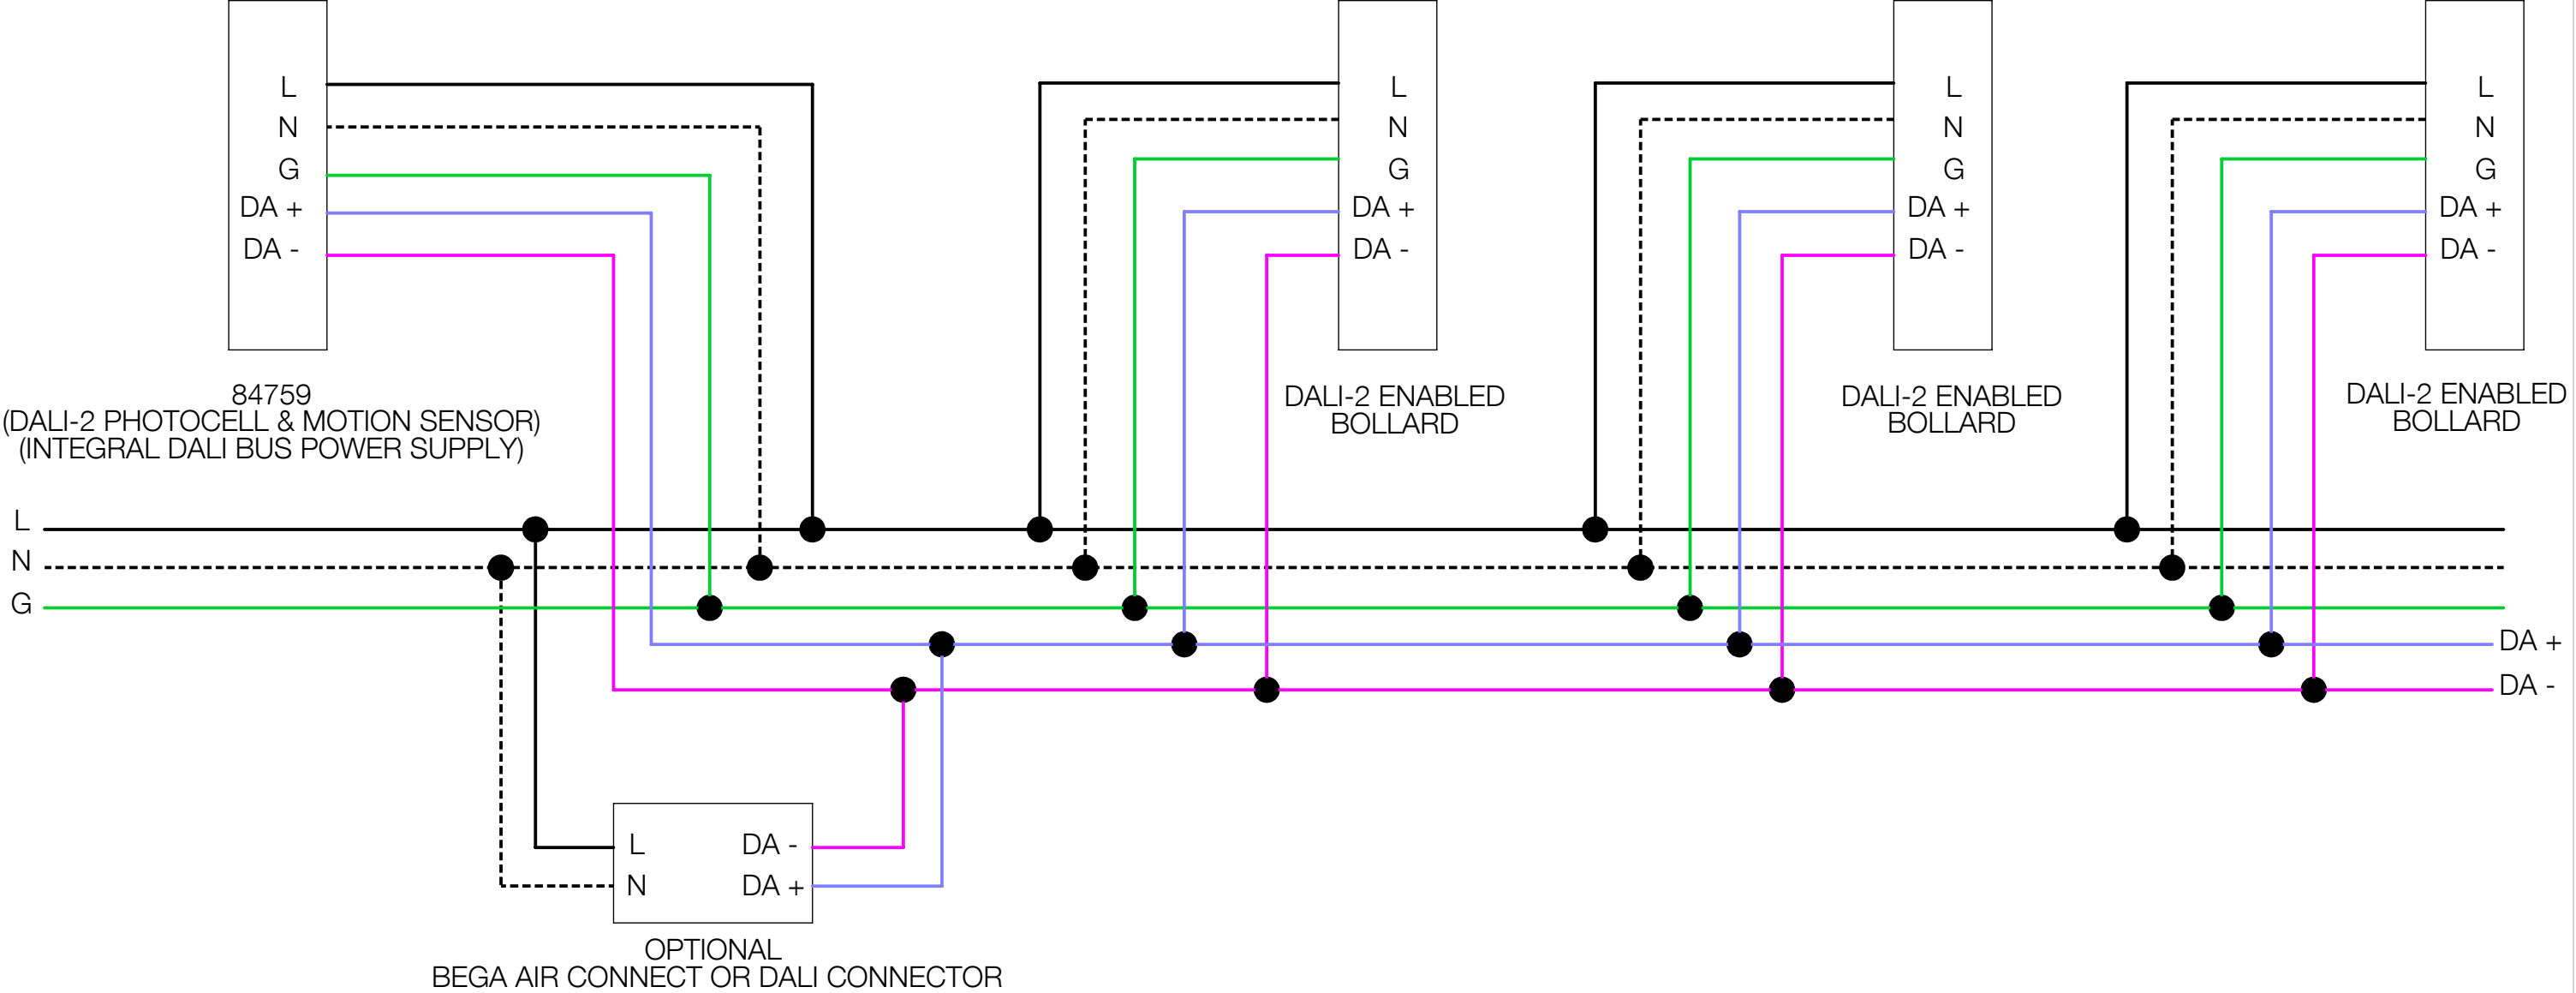

- NOTES:
1. WIRING DIAGRAM SCHEMATIC FOR SENSORS OF MULTIPLE LUMINAIRES CONTROL THE SAME LUMINAIRE GROUP. ALL LUMINAIRES IN THE GROUP WILL BE SWITCHED ON AS SOON AS ONE OF THE SENSORS DETECTS MOVEMENT.
 2. ONCE INSTALLED, THE LUMINAIRE CAN BE OPERATED IMMEDIATELY IN ITS FACTORY SETTINGS; CONFIGURATION NOT REQUIRED. ALTERNATIVELY, THE DALI-2 PHOTOCELL & PIR MOTION SENSOR CAN BE CONFIGURED VIA SMARTPHONE USING BEGA CONNECT, WHEN USED WITH A BEGA AIR CONNECTOR OR DALI CONNECTOR.
 3. THE DALI-2 PHOTOCELL & PIR MOTION SENSOR IS DIRECTLY CONNECTED AND SUPPLIED BY THE DALI BUS. THE 84759 BOLLARD TUBE HAS AN INTEGRAL BUS POWER SUPPLY.
 4. THE VOLTAGE DROP ON THE DALI LINE AT MAXIMUM LENGTH (1000FT) AND MAXIMUM BUS LOAD (250MA) MUST NOT EXCEED 2V.
 5. CONTACT FACTORY FOR TECHNICAL SUPPORT

BEGA			
1000 BEGA Way, Carpinteria, California 93013		P (805) 684-0533 - www.bega-us.com	
APPROVED: _____ DATE: _____		DESCRIPTION: DALI MOTION SENSOR - WIRING	
TYPE: _____			
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BEGA NORTH AMERICA, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BEGA NORTH AMERICA, INC. IS PROHIBITED.		SIZE B	PART NO. 84759
		REV -	
NOT TO SCALE		10/7/2025	SHEET 4 OF 4